

Louvered ventilation

VELUX®
Commercial


The high-performance louvre systems for VARIO or GRILLODUR® continuous rooflights, for providing large areas with fresh air or redirecting large volumes of warm air

Louvered ventilation


- can be integrated as a SHEV device or for providing large areas with fresh air
- installation: can be installed either in the VARIO continuous rooflights or with an upstand directly in the flat roof or thermal roof/insulated roof
- pneumatic or electrical opening device
- roof slopes: up to 10° for most applications; up to 30° or 45° when using with mono- or dual-pitched rooflights

The multifunctional louvre or blind system is an economical solution to provide large areas with fresh air or redirecting large volumes of warm air. It can be integrated as a SHEV device within the roof and is also compatible with all VARIO and GRILLODUR® continuous rooflights. They are activated by pneumatic or electrical opening devices.

A range of customisation options are available, allowing the system to be adapted to customer and project requirements. Feel free to contact us, we will find the right solution.



VARIO continuous rooflight with louvered smoke ventilation

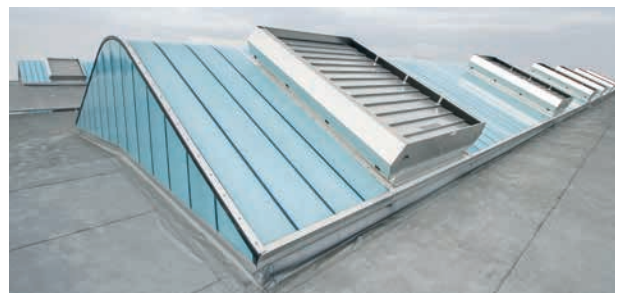

GRILLODUR® pitched rooflight with louvered ventilation

2.1.1
VARIO-THERM

2.1.2
VARIO-NORM

2.1.3
VARIO-THERM-S

4.1.2
GRILLODUR®
barrel vault rooflights

4.1.3
GRILLODUR®
pitched rooflights

